



Confidex Survivor™

Technical Product Specification
Version 1.2
November 2008

Contents

1.	PRODUCT DESCRIPTION	2
1.1	SPECIFICATION DATA.....	2
1.2	DIMENSIONS	2
1.3	PERFORMANCE DATA	3
1.4	SUPPORTED COMPONENTS	4
1.5	SUPPORTED SERVICES.....	5
1.6	POSSIBLE APPLICATIONS	5
2	INSTALLATION INSTRUCTIONS.....	6
2.1	TAG PLACEMENT.....	6
2.2	TAG FIXING METHODS	6
3	ORDER INFORMATION.....	7

1. Product description

The Confidex Survivor™ C1G2 UHF hard tag is designed to serve surveillance needs for transportation of goods. Survivor offers the best performance-to-cost ratio and applicability in the market. Its unique features form a clever instrument for industrial and logistics applications from local to global operations.


The Survivor tag has been selected to various roll cage and other container applications and has become the de-facto tag for most of the demanding RFID projects around the world. The Survivor tag is also used to track large valuable items and vehicles, including construction parts and steel pipes, as well as trucks in the petrochemical industry.

1.1 Specification data

Device type	Class 1 Generation 2 passive UHF RFID transponder
Air interface protocol	EPCGlobal Class1 Gen2 ISO 18000-6C
Operational frequency	885-869 MHz (EU), 902-928MHz (US), 952-955 MHz (JPN)
IC options	NXP UCODE G2XM
EPC memory	up to 240 bit (G2XM)
EPC memory content	Unique number encoded as a default
Extended memory	512 bit (G2XM)
Read range	up to 8-12 m (26-39 ft) with reader power 2W ERP (dependent on application)
Applicable surface materials	Metal surfaces
Encapsulation material	Dark grey PC/ABS
Weight	25 g
Delivery format	Single
Amount in box	250 pcs (default)
Product is RoHS compliant	

1.2 Dimensions


General dimensions 224 x 24 x 8 mm / 8.8 x 0.94 x 0.31 in
(Width x Height x Thickness)

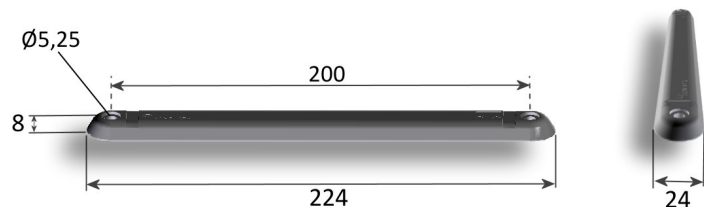

1.3 Performance data

Electrical performance


Survivor
NXP G2XM

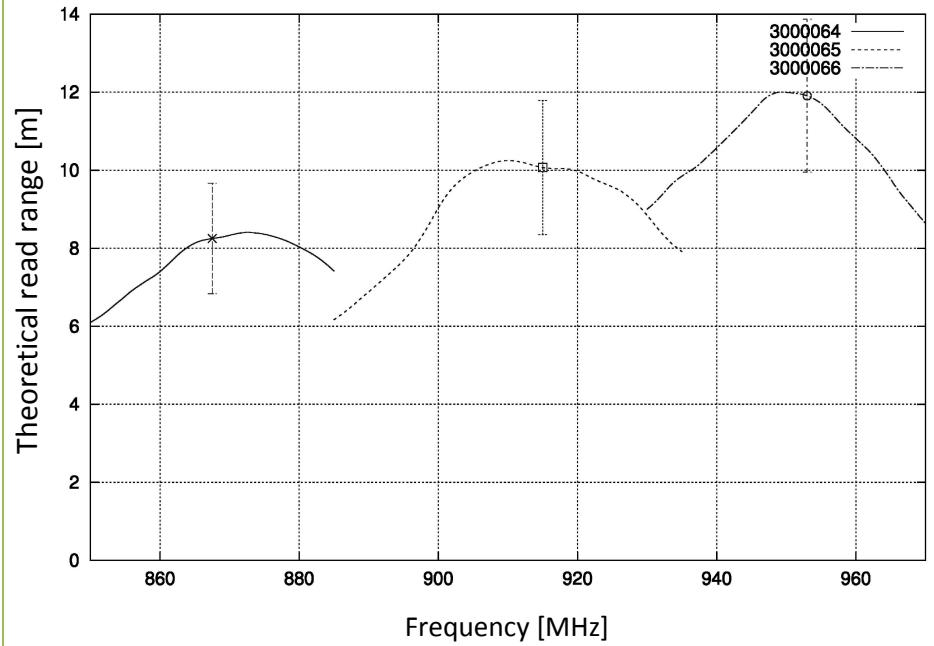

* Read ranges are theoretical values that are calculated for non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power according to ETSI EN 302 208 (2W ERP). Variation of 3σ from test batch marked in the picture.

Radiation patterns

Estimated radiation pattern when tag orientation towards reader antenna is optimized.

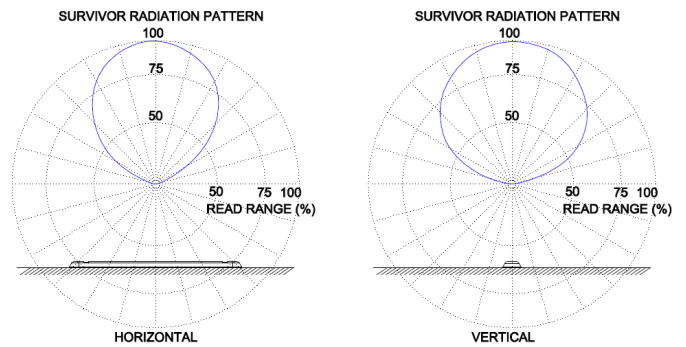

Resistance against environmental conditions*


Operating temperature	-35°C to +85°C / -31°F to +185°F
Ambient temperature	-35°C to +85°C / -31°F to +185°F @ -35°C / -31°F 16h duration
IP classification	IP67: <ul style="list-style-type: none">- Complete protection against dust- Protection against temporary immersion in water
Weather ability	Good, incl. UV-resistance and sea water
Vibration resistance	Good: <ul style="list-style-type: none">- According to JESD22-B103B, service condition 2; vibration that is aligned with tag thickness (z-axis).
Chemical resistance	No physical or performance changes in: <ul style="list-style-type: none">- Salt water (salinity 10%, tested in 168h exposure)- NaOH (10%, pH 13, tested in 24h exposure). Note, tag's metal background laminate may corrode.- Sulfuric acid (10%, pH 2, tested in 168h exposure). Note, tag's metal background laminate may loosen.- Motor oil (tested in 168h exposure) Generally good resistance against moderate concentrations of acids, alcohols, alkalis, detergents and cleaners. Acetone should be avoided.
Expected lifetime	Years in normal operating conditions

* Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.


1.4 Supported components

Survivor concave part


Purpose	Concave part for fixing Survivor on curved parts, like on tubes or roll cage's curved metal frames
Advantages	Eases up the tag fixing, brings additional mechanical support for the tag by filling up the gap in between the tag and curved background
Dimensions	225 x 25 mm / 8.86 x 0.98 in

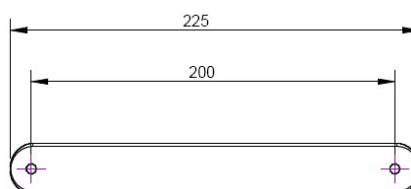

Mechanical pictures

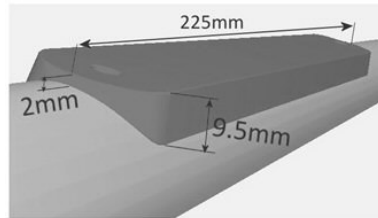

Concave part

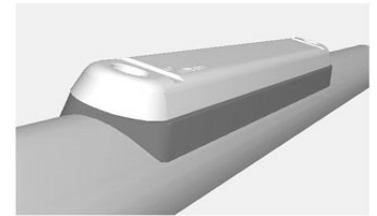

Concave part with the tag

Material	PC/ABS
Delivery format	Single, as a separate part from the tag
Minimum order quantity	10 000 pcs

1.5 Supported services

Standard customer personalization

Either one or several personalization options can be selected.

Encoding	- Unique number <i>Default in the tags</i>	Unique number is programmed to IC EPC memory bank
	- EPC encoding	Customer specific EPC code can be programmed to IC EPC memory bank
Visual marking	- Data label	White adhesive data label with black printing can be added on top of the tag: Information can include printed EPC code, UID code, barcode or customer logo etc. Size: 35 x 11 mm.
	- Tampo printing	Some customer specific image or data is printed on top of the all tags.
	- Laser engraving	Variable customer specific data can be engraved on the tag. Maximum character amount 24, can contain numbers and letters.
	- Pair packing	Tags delivered in pairs
Minimum order quantity	10 000 pcs for standard customer specific personalization	

1.6 Possible applications

Metal	Metal containers, roll containers, industrial and retail metal RTI's in general
Plastic	Plastic RTI's, also water and chemical containers
Wood	Wooden transit items
Any material types	

2 Installation instructions

2.1 Tag placement

Survivor tag polarization is aligned with the Confidex text. Tag front side is marked with “Confidex” text, in order to get maximum performance don’t cover this front side. Survivor can be used on any type of materials, including metal, plastic and wood.



2.2 Tag fixing methods

Mechanical fixing

Mechanical fixing ensures the best and most reliable grip in various use conditions. It's recommended to be used in every application that includes risk for high mechanical stress or low temperature during tag fixing. Survivor tag can be attached mechanically with:

- Cable ties (metal or plastic)
- Screws (size M5)
- Pop rivets (size 4.8 mm)

Procedure: When fixing the tag with screw or rivets, drill two holes on the surface 200mm apart from each other and fix the tag.

Adhesive fixing

- Silicone sealants

Silicone sealant adhesives like Dow Corning AS 7096 provide very high bond strength and resistance against mechanical stress. Usually, fixing must be done indoors in room temperature and in 50% humidity. Total curing time can be several days.

Procedure: When fixing the tag with sealant adhesive, insert a layer of sealant under the tag and press the tag on the surface. Increase the bond by adding extra sealant from the tag holes.

Survivor tag is not sensitive to silicone sealant thickness under or on the sides of the tag. Please refer silicone sealant supplier for exact product specifications.

Additional fixing tools

- Concave part

Additional concave part can be used when Survivor should be attached on curved surface, such as small pipes and metal profiles with round cross section (diameter approx. 34mm). With the concave part, tag attachment is easy and during the use the concave will give even better mechanical structure for the tag.

Procedure: Concave part and Survivor will be combined during the tag fixing. Use the same mounting material as described earlier in the part Mechanical fixing. If using screws or rivets, drill two holes 200mm apart from each other on the item that is going to be tagged, insert the tag and concave part to the right place and fix them firmly on the surface.

3 Order information

Product number	Product name
3000064	Survivor ETSI G2XM
3000065	Survivor FCC G2XM
3000066	Survivor JPN G2XM

For additional information and technical support contact Confidex Ltd.

FINLAND

Confidex Oy Ltd.
Haarlankatu 1, 33230 Tampere, Finland
Tel. +358 10 4244 100 Fax. +358 10 4244 110
contact@confidex.fi www.confidex.fi

USA

Confidex Inc.
1502 Fair Weather Ct., Apex, NC 27523, USA
Tel. +1 919 349 5607 fax +1 810 958 0515
www.confidex.net

CHINA

Confidex China
Guangzhou XinTag Electronics Science and Technology Co. Ltd
3 F Section E Guangzhou Technology Innovation Base
No. 80 Lan Yue Road, Science City, PRC 510663 Guangzhou,
People's Republic of China
Tel. +86 20 3205 7361 fax +86 20 3205 1429
www.confidex.net.cn

DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions.

Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.