



Confidex Casey™ NXP G2XL
3000104

Technical Product Specification
Version 1.0
September 2008

Contents

1.	PRODUCT DESCRIPTION	2
1.1	SPECIFICATION DATA	2
1.2	DIMENSIONS	3
1.3	PERFORMANCE DATA	4
1.4	SUPPORTED COMPONENTS	5
1.5	SUPPORTED SERVICES	5
1.6	INFORMATION OF USED MATERIALS	5
1.7	POSSIBLE APPLICATIONS	5
2	INSTALLATION INSTRUCTIONS	6
3	ORDER INFORMATION	7

1. Product description

Confidex Casey™ is designed to be used as a general label especially in the packages with proximity to liquid or metallic content. With proven EPC Class 1 Generation 2 –compliant RFID technology and reliable material selection Confidex Casey provides possibilities to effectively improve management of various goods in daily use. To be also compatible with existing inventory management systems Confidex Casey has a printable synthetic face paper to be used for e.g. visual item number, barcode, company logos, etc. printing for the specific customer personalization.

Typical applications include retail items e.g. plastic or corrugated cardboard boxes, where content varies from fruits, vegetables, other groceries to liquid bottles or utilities. Glass as well rubber as difficult high loss materials for RFID labels are also optimum surfaces for Confidex Casey to be used e.g. in asset management or work in process follow-up. Powerful wide-band antenna design together with water resistant synthetic face paper enables number of other applications, in which Confidex Casey proves its superior performance.


1.1 Specification data

Device type	Class 1 Generation 2 passive UHF RFID transponder
Air interface protocol	EPCGlobal Class1 Gen2 ISO 18000-6C
Operational frequency	860-960 MHz
IC	NXP UCODE G2XL
EPC memory	up to 240 bit
Extended memory	-
Read range	up to 4-6m / 13-19ft, reader power 2W ERP (dependent on application)
Face material	Synthetic paper
Background adhesive	Permanent adhesive
Weight	1 g
Delivery format	On reel
Pitch on reel	28,575mm
Amount on reel	2000pcs (default)
Reel core inner diameter	76mm / 3"
Environmental compatibility	Product is RoHS compliant


1.2 Dimensions

**General dimensions
and IC location**


92mm x 24mm x 0,2mm / 3.62" x 0.94" x 0.01"

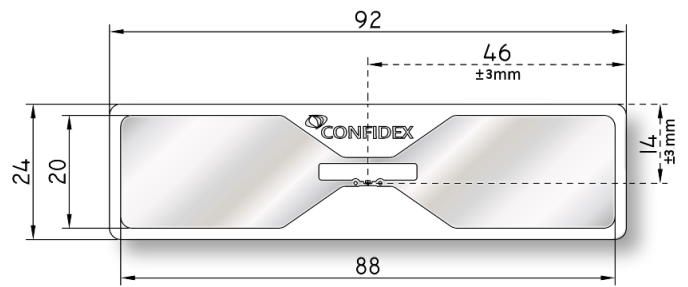

Cross section

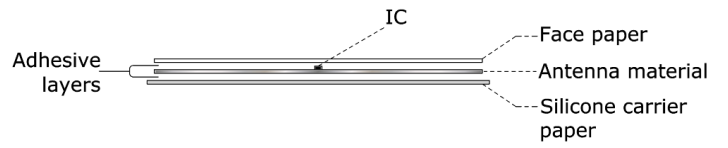

Delivery in reel format

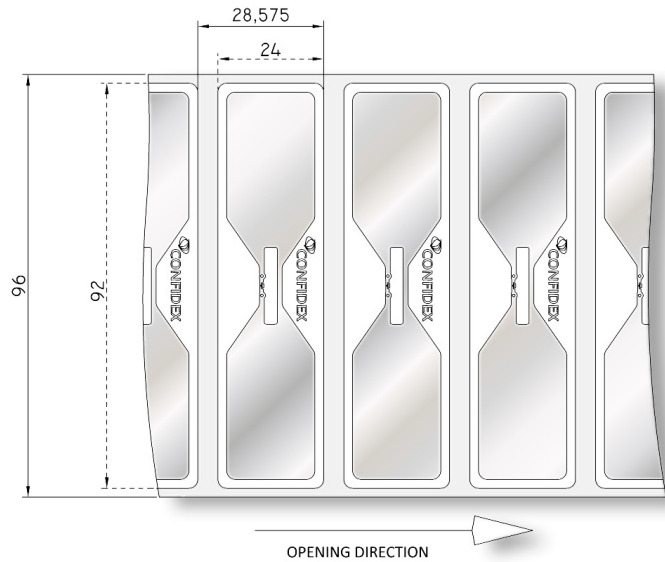

1.3 Performance data


Electrical performance

Material / Read range	Medium (~2-4m)	Good (~4-6m)	Excellent (~6-8m)
Free air		EU, JPN	US
Glass	JPN	EU	US
Cardboard		EU, JPN	US
Plastic		JPN	EU, US
Rubber		EU, US, JPN	
Close to liquid	EU, US, JPN		

* Presented reading ranges are calculated values in non-reflective environment, in where antennas with optimum directivity are used with maximum allowed operating power: EU 865-868 MHz (2W ERP), US 902-928 MHz (4W EIRP), and JPN 952-954MHz (4W EIRP).

Radiation patterns

Estimated radiation pattern when tag orientation towards reader antenna is optimized.

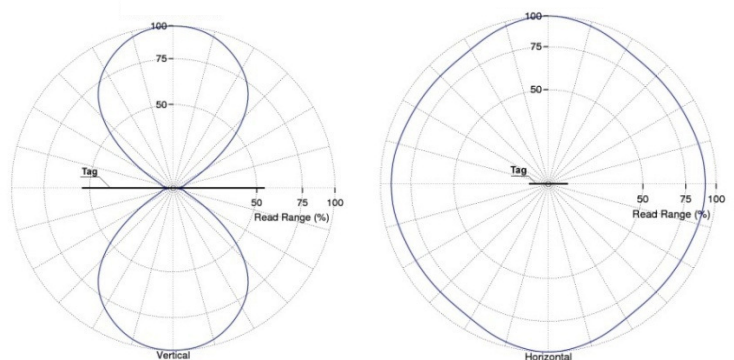

Resistance against environmental conditions*

Operating temperature	-35°C to +85°C (-31°F to +185°F)
Ambient temperature	-35°C to +85°C (-31°F to +185°F)
Storage condition	2 years in +20°C / 50% RH (shelf life for adhesive)
Water resistance	Good, tested for 5 hours in 1 meter deep water
Chemical resistance	No physical or performance changes in: <ul style="list-style-type: none"> - Salt water (salinity 10%), tested in 24h exposure - NaOH (10%, pH 13), tested in 2h exposure - Sulfuric acid (10%, pH 2), tested in 168h exposure - Acetone, tested in 30min exposure - Motor oil, tested in 168h exposure
Expected lifetime	Years in normal operating conditions

* Values in the table are the best recommendations; resistance against environmental conditions depends on the combination of all influencing factors, exposure duration and chemical concentrations. Thus, product's final suitability for certain environmental conditions is recommended to be tested. Contact Confidex for more specific information.

1.4 Supported components

There are no additional components available for this product.

1.5 Supported services

Standard customer personalization

EPC coding	Customer specific EPC code can be programmed to IC.
EPC printing	Customer specific EPC code can be printed onto the label.
UID printing	IC UID code can be printed onto the label.
Alignment marks	Customer specific alignment marks for further printing can be printed onto the label.
Minimum order quantity	10 000 pcs for standard customer specific personalization. Consult with Confidex Sales for lower quantity.

Special personalization available on request

Customer specific printing	Customer specific artwork can be printed onto the label.
Customer specific cutting	Labels can be cut according to customer specific layout design.

1.6 Information of used materials

Back side adhesive	Good adhesion on various surfaces.
Paper	A matt white polypropylene film designed for top quality printing.
Printing possibility	The face paper includes a specially coated surface and is suited to provide top printing quality in all printing processes, whether it is single or multicolor, line or process color printing.

1.7 Possible applications

Glass	Windshield label
Plastic	Retail items, in which absorbing materials close to the label
Cardboard	Retail items, in which absorbing materials close to the label
Rubber	Returnable carpets with rubber bottom

2 Installation instructions

Label orientation and application

Label polarization is along the tag's longest dimension




Preferred label location in a product

- The best readability is achieved when Confidex Casey is placed in a vertical direction to the top corner in a product.

Recommended application to a product is in room temperature to a clean surface.

Label antenna parts should not be in contact with metal to enable best possible performance of the label.



Protection of tag during usage

Minimum bending diameter of the Confidex Casey is defined to be 50mm. Do not bend the label above the limit.

Never touch on the location of the IC. IC chip is sensitive electrical component and can be damaged if unexpected pressure is applied on the chip.

Try to avoid mechanical impacts to the Confidex Casey. IC and antenna may be damaged due to mechanical shocks.

Recommended operation conditions

Although the *Confidex CaseyTM* is tested to be resistant in certain environmental conditions it is recommend to install the label into the place, which is protecting the label against contaminations and mechanical shocks. Reliability of the Confidex Casey is defined to be its maximum if label is positioned in such safe place.

3 Order information

Product number	Product name
3000104	Casey NXP G2XL

For additional information and technical support contact Confidex Ltd.

FINLAND

Confidex Oy Ltd.
Haarlankatu 1, 33230 Tampere, Finland
Tel. +358 10 4244 100 Fax. +358 10 4244 110
contact@confidex.fi www.confidex.fi

USA

Confidex Inc.
1502 Fair Weather Ct., Apex, NC 27523, USA
Tel. +1 919 349 5607 fax +1 810 958 0515
www.confidex.net

CHINA

Confidex China
Guangzhou XinTag Electronics Science and Technology Co. Ltd
3 F Section E Guangzhou Technology Innovation Base
No. 80 Lan Yue Road, Science City, PRC 510663 Guangzhou,
People's Republic of China
Tel. +86 20 3205 7361 fax +86 20 3205 1429
www.confidex.net.cn

DISCLAIMER

THE MATERIALS, PRODUCTS AND SERVICES ARE SOLD SUBJECT TO ITS STANDARD CONDITIONS OF SALE, WHICH ARE INCLUDED IN THE APPLICABLE DISTRIBUTOR OR OTHER SALES AGREEMENT. ALTHOUGH ANY INFORMATION, RECOMMENDATIONS, OR ADVICE CONTAINED HEREIN IS GIVEN IN GOOD FAITH, CONFIDEX MAKES NO WARRANTY OR GUARANTEE, EXPRESS OR IMPLIED, (i) THAT THE RESULTS DESCRIBED HEREIN WILL BE OBTAINED UNDER END-USE CONDITIONS, OR (ii) AS TO THE EFFECTIVENESS OR SAFETY OF ANY DESIGN INCORPORATING ITS PRODUCTS, MATERIALS, SERVICES, RECOMMENDATIONS OR ADVICE. EXCEPT AS PROVIDED IN CONFIDEX STANDARD CONDITIONS OF SALE, CONFIDEX AND ITS REPRESENTATIVES SHALL IN NO EVENT BE RESPONSIBLE FOR ANY LOSS RESULTING FROM ANY USE OF ITS MATERIALS, PRODUCTS OR SERVICES DESCRIBED HEREIN.

Each user bears full responsibility for making its own determination as to the suitability of Confidex products, materials, services, recommendations, or advice for its own particular use. Each user must identify and perform all tests and analyses necessary to assure that its finished systems incorporating Confidex products, materials, or services will be safe and suitable for use under end-use conditions.

Nothing in this or any other document, nor any oral recommendation or advice, shall be deemed to alter, vary, supersede, or waive any provision of this Disclaimer, unless any such modification is specifically agreed to in a writing signed by Confidex.